

**Transient Voltage  
Surge Suppressors By:**

**ST-RJ45-#-100M  
Data Line Models**

Network Data Circuit protection device with Discrete All-Mode Protection



"Our Name Says It All"

P.O. Box 330607  
Ft. Worth, TX 76163  
Phone: 817.483.8497  
Fax: 817.572.2242  
www.sinetamer.com

The Series ST-RJ45-#-100M devices are designed to protect data transmission circuits. These devices are intended for installation as close to the electrical power source of the equipment as possible so as to allow for a common point for grounding.

This device provides protection to all 8 lines (4 pairs) through the RJ45 connectors provided, making your installation a breeze. A ground lug is provided on the face of the unit to insure a low impedance ground discharge path.

The unique design of these devices makes them among the most versatile TVSS devices on the market with superior performance specs and a warranty that is second to none.

**GENERAL**

<b>Description:</b>	Series wired transient voltage surge suppressor with <b>Optimal Response Network™</b> circuitry for protection of data circuits.
<b>Application:</b>	Designed for use on data, signal and current loop circuits to protect data transmission system equipment from damaging transients generated between terminals and equipment in the data collection/transmission system.
<b>Warranty:</b>	<b>25 Years Unlimited Free Replacement</b>

**MECHANICAL**

<b>Enclosure:</b>	Plastic, UL 94V-0
<b>Mounting:</b>	External mounting feet. DIN mounting feet (DIN option)
<b>Connection Method:</b>	RJ45 modular connectors
<b>Shipping Weight:</b>	< 1 lbs


**CIRCUITRY**

<b>Circuit Design:</b>	Series wired hybrid design incorporating discrete all mode protection and utilizing our <b>Optimal Response Network™</b> design to provide lowest possible let-through voltages. All suppression circuits are encapsulated in our high dielectric compound to assure long component life and complete protection from the environment and/or vibration.
<b>Protection Modes:</b>	Dedicated protection components and circuitry for each mode. Discrete L-L (Normal Mode) and L-G (Common Mode)

**PERFORMANCE**

<b>Maximum Continuous Operating Voltage:</b>	7.5, 15, 36, 54, and 140 V
<b>Maximum Continuous Operating Current:</b>	500 mA
<b>Series Resistance:</b>	0 Ohms per wire
<b>Maximum Data Rate:</b>	100 Mbps
<b>Peak Surge Power per pair:</b>	1,500 Watts per mode (4,500 Watts total).
<b>Response Time:</b>	< 1 ns

Let-Through Voltages Using ANSI/IEEE C62.45 & C62.41 Test Environment: Static, positive polarity. All voltages are peak ( $\pm 10\%$ ).			
Model	Maximum Continuous Operating Voltages	Test Mode	10 x 1,000 $\mu$ sec Impulse waveform IPP = 100 Apk
ST-RJ45-5-100M	7.5 V	L-G	< 20
	7.5 V	L-L	< 20
ST-RJ45-12-100M	15 V	L-G	< 30
	15 V	L-L	< 30
ST-RJ45-24-100M	36 V	L-G	< 60
	36 V	L-L	< 60
ST-RJ45-48-100M	54 V	L-G	< 90
	54 V	L-L	< 90
ST-RJ45-140-100M	140 V	L-G	< 250
	140 V	L-L	< 250

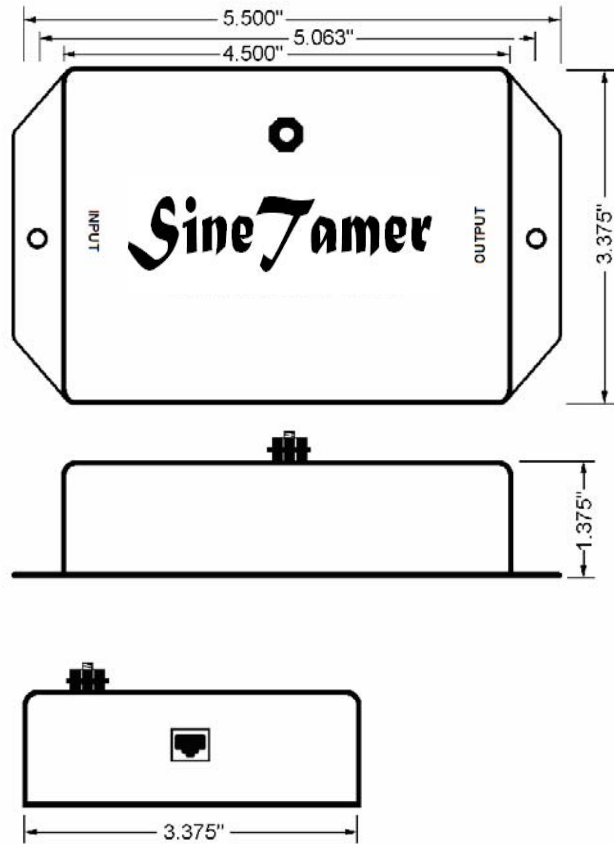

**Modular RJ45 Connection**

Actual unit may vary from picture.